


COMMON FEATURES

Cellular Radio Frequency Bands	LTE-FDD: B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28 LTE-TDD: B38/B39/B40/B41 (4G CAT1) UMTS: B1/B2/B4/B5/B6/B8/B19 (3G) GSM: B2/B3/B5/B8 (2G)	
Location	GPS, Cellular, Wi-Fi, BLE	
Sensors	Temperature	-10° C to +85° C
	Humidity	0 to 95% RH
	Light, Ambient & Infrared	0...20,000 lux; (0...30,000 lumens/m2)
	Pressure	260 to 1260 mba
	3-axis Accelerometer	Shock / Motion / Tilt
Wi-Fi standards	802.11b/g/n; 802.11d/e/i/h	


Bluetooth	5.0 BLE (Bluetooth Low Energy)
Compliance	FCC, IC, CE, FAA, IATA, EASA, DO-160G Cat H, RoHS, WEEE, UN-38.3, 21 CFR Part 11
Measurement Intervals	User-Programmable: 1 second to 24 days
Operating Environment	-20° C to +60° C (-4° F to +140° F) <95% non-condensing
Button	Programmable Non-Mechanical Touch
Calibration	NIST-Traceable; 17025 compliant certification available upon request
External Temperature Probes	The PT supports a wide range of USB and BLE probes. Explore our dedicated probe brochure.

PT300D WITH ADVANCED SENSOR PACK

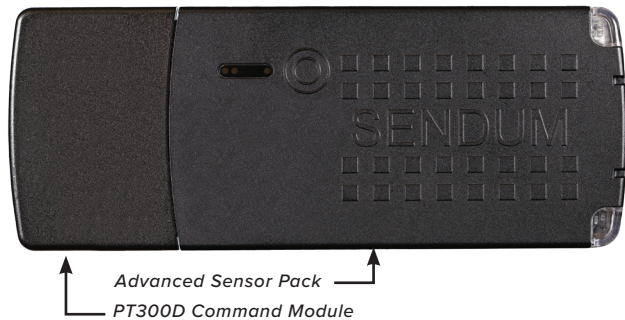

Size & Weight	135 x 53 x 14 mm (5.3 x 2.1 x 0.6") 128 g (4.5 oz.)
Battery	Lithium-Ion
Battery Capacity	4,400 mAh; 15.84 Wh
Power Input	100 V - 240 V 5W AC
LED Lights	Three: 1) Network, 2) Battery, 3) Charger
USB	Mini USB (Type B, / USB 1.0)

PT300D WITH ACCESSORY PACK

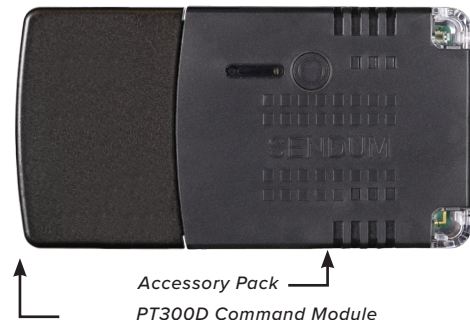

Size & Weight	99 x 53 x 14 mm (3.9 x 2.1 x 0.6") 59 g (2.1 oz.)
Power Input	3 - 5.3 V DC
Regulated Output	3.6 V DC 50 mA (Programmable)
Digital Input	2 - 6 V DC (Programmable)
LED Lights	Three: 1) Cellular, 2 & 3): Programmable
USB	Micro USB-A

Sendum, keeping your goods safe and you in control of your goods!™